

Remote Firing Device

Remote Firing Device


Overview

RFD consists of 1 transmitter and up to 10 receivers. Transmitter can fire the donator connected to receivers remotely. and can fire with time limit function of receivers if necessary

Features

- Display with Korean language
- Firing Control (basic 4 receivers, max 10 receivers)
- Electric detonator can be connected with serial 4(max), parallel 25(max) connections
- Check the status of receiver and control over the both-way communication
- Control distance : LOS 5Km, Forest 1Km
- Satisfies the reliability, robustness, and proven interoperability under U.S. Department of Defense standard (waterproof, shock, vibration, temperature / humidity, salt spray, electro-magnetic interference)

Configuration and Applications

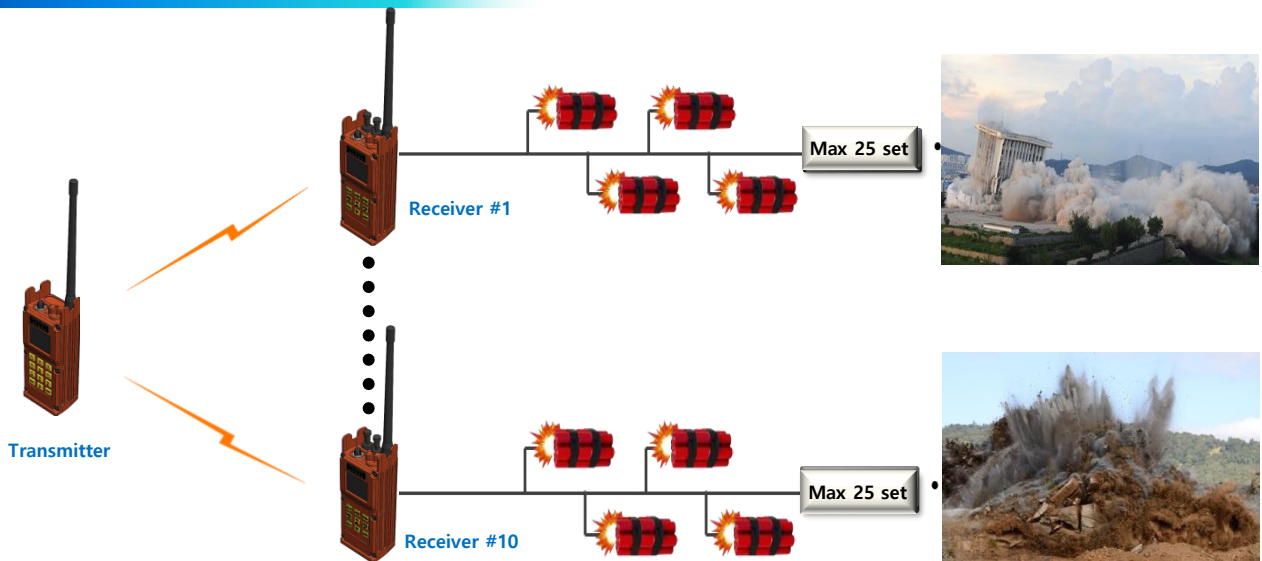

Specifications

● Transmitter

- VHF Band, 3W(max.)
- Control Receiver(4~10)
- 1st/2nd Battery use, transmit over 100 times
- weight : below 600g, size :70(W) X 45(D) x 160(H)mm

● Receiver

- VHF Band, 3W(max.)
- remote / time / remote & time control firing
- 1st/2nd Battery use, run & firing over 24 hours
- weight : below 600g, size :70(W) X 45(D) x 160(H)mm

WooriByul

■ Address : 89, Hwanggeum 1-ro, Yangchon-eup,
Gimpo-si, Gyeonggi-do, Korea

■ TEL : +82-31-980-7500 / FAX : +82-31-985-6222

■ <http://www.wooribyul.co.kr>